


Zener Diodes, 40 Watt Peak Power Dual Common Anode Zeners

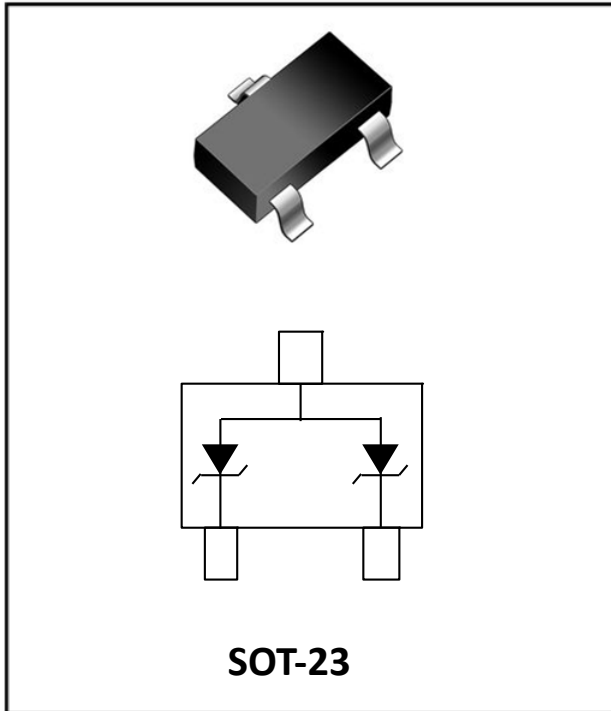

Features

- SOT-23 Package Allows Either Two Separate Unidirectional Configurations or a Single Bidirectional Configuration
- Peak Power-40W@1.0ms(Unidirectional)
- Transient protection for each line according to IEC61000-4-2(ESD): $\pm 30\text{kV}$ contact, $\pm 30\text{kV}$ air
- ESD Rating: Class 3B($> 16\text{kV}$)per the HBM
- Maximum Clamping Voltage@Peak Pulse Current
- RoHS Compliant
- Part no. with suffix "Q" means AEC-Q101 qualified


Applications

- Test Equipment/Instrumentation
- Notebooks / Desktops / Servers
- Computer Peripherals
- Automotive applications

Mechanical Data

- Package: SOT-23
- Lead Finish: Matte Tin
- Case Material: "Green" Molding Compound
- Moisture Sensitivity: Level 1 per J-STD-020

■Definitions of electrical characteristics

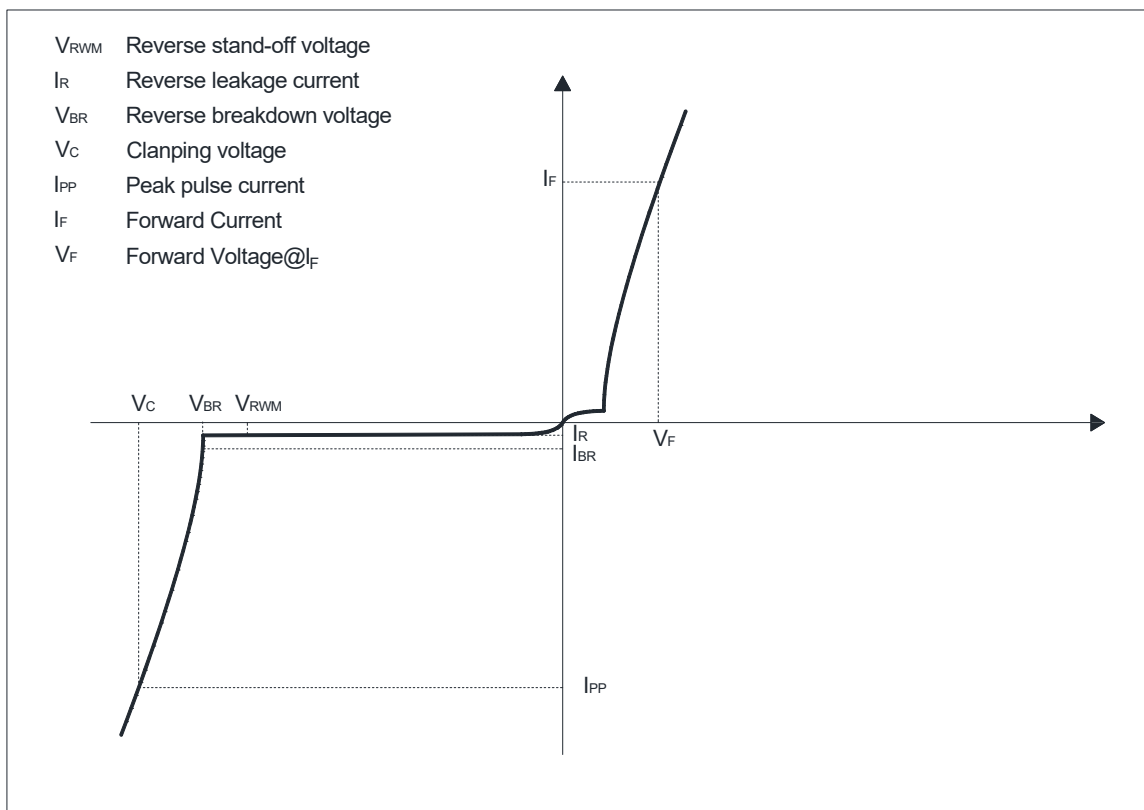



MMBZ27VAQ

■ Maximum Ratings

| PARAMETER | SYMBOL | LIMITS | UNIT |
|---|------------|----------|---------------|
| Peak pulse power ($t_p = 10/1000\mu s$) | P_{pk} | 40 | W |
| ESD according to IEC61000-4-2 air discharge | V_{ESD} | ± 30 | KV |
| ESD according to IEC61000-4-2 contact discharge | | ± 30 | |
| Power Dissipation | P_D | 225 | mW |
| Thermal Resistance Junction to Ambient | R_{thJA} | 556 | $^{\circ}C/W$ |
| Junction temperature | T_J | -55~150 | $^{\circ}C$ |
| Storage temperature | T_{STG} | -55~150 | $^{\circ}C$ |

Notes:

CAUTION: Stresses above those listed in "Absolute Maximum Ratings" may cause permanent damage to the component. This is a stress only rating and operation of the component at these or any other conditions above those indicated in the operational sections of this specification is not implied.


■ Electrical Characteristics ($T_J=25^{\circ}C$)

| PARAMETER | Symbol | UNIT | Conditions | Min | Typ | Max |
|---------------------------|-----------|------|-----------------------------------|-------|-----|-------|
| Reverse Standoff Voltage | V_{RWM} | V | $I_R \leq 1\mu A$ | | | 22 |
| Reverse breakdown voltage | V_{BR} | V | $I_{BR} = 1mA$ | 25.65 | 27 | 28.35 |
| Reverse leakage current | I_R | nA | $V_{RWM} = 22V$ | | | 50 |
| Forward Voltage | V_F | V | $I_F = 10mA$ | | | 0.9 |
| Clamping voltage | V_C | V | $I_{PP} = 1A, t_p = 10/1000\mu s$ | | | 40 |

■ Ordering Information (Example)

| PREFERED P/N | PACKING CODE | UNIT WEIGHT(mg) | MINIMUM PACKAGE(pcs) | INNER BOX QUANTITY(pcs) | OUTER CARTON QUANTITY(pcs) | DELIVERY MODE |
|--------------|--------------|-----------------|----------------------|-------------------------|----------------------------|---------------|
| MMBZ27VAQ | F2 | Approximate 10 | 3000 | 30000 | 120000 | 7 reel |

■ Marking Information

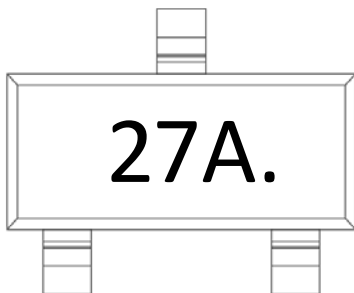

Note:

1. All marking is at middle of the product body
2. All marking is in laser marking
3. Body color: Black



■ Characteristics (Typical)

Fig.1: P_D-T_A

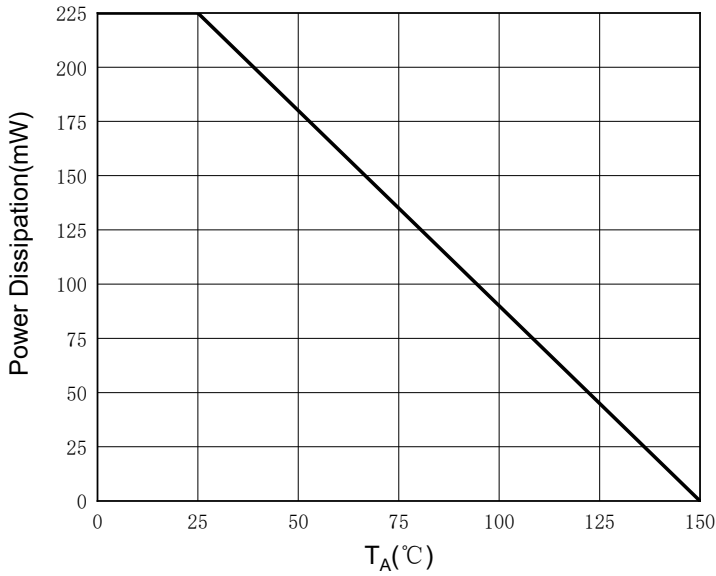


Fig.2: Typical Breakdown Voltage VS Temperature

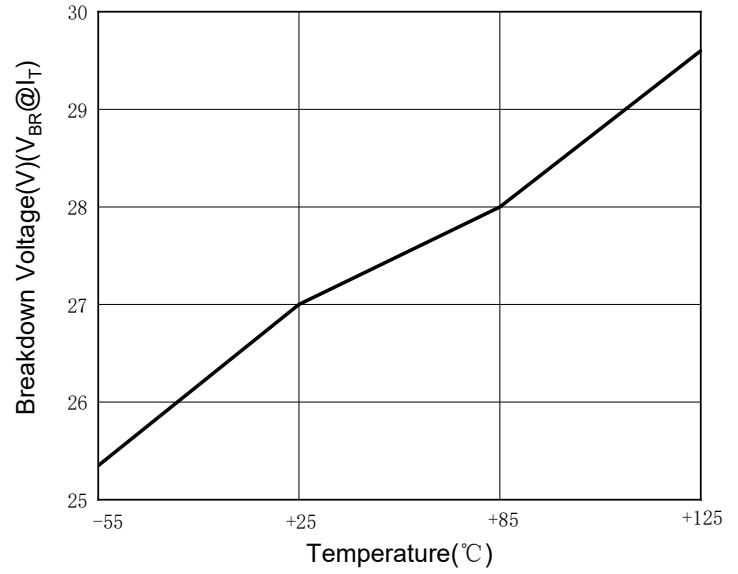


Fig.3: Reverse Characteristics

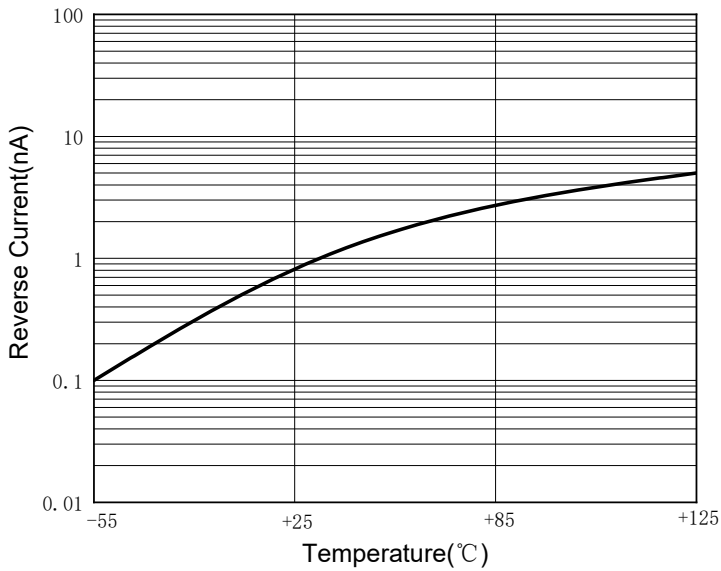


Fig.4 Pulse Waveform

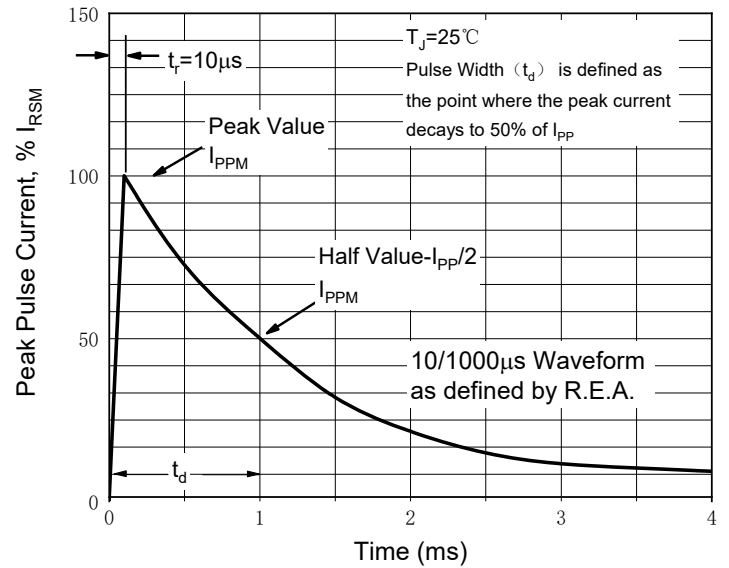


Fig.5: Power Derating Curve


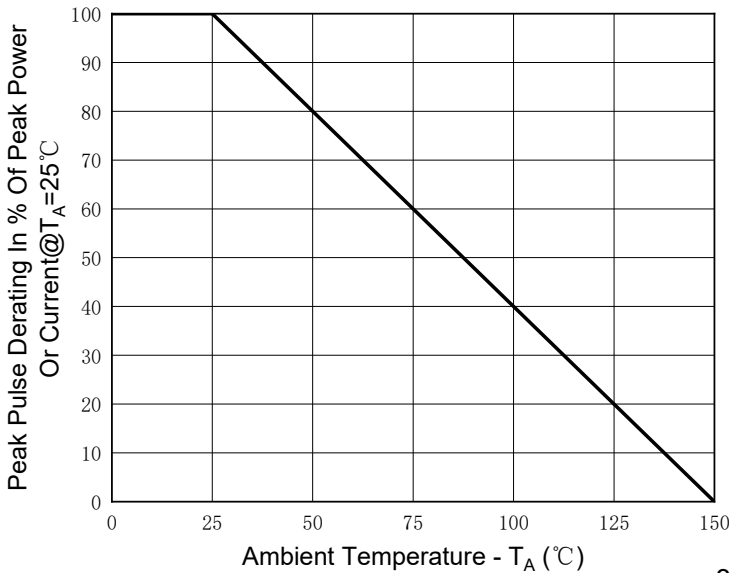






Fig.6: Capacitance Characteristics



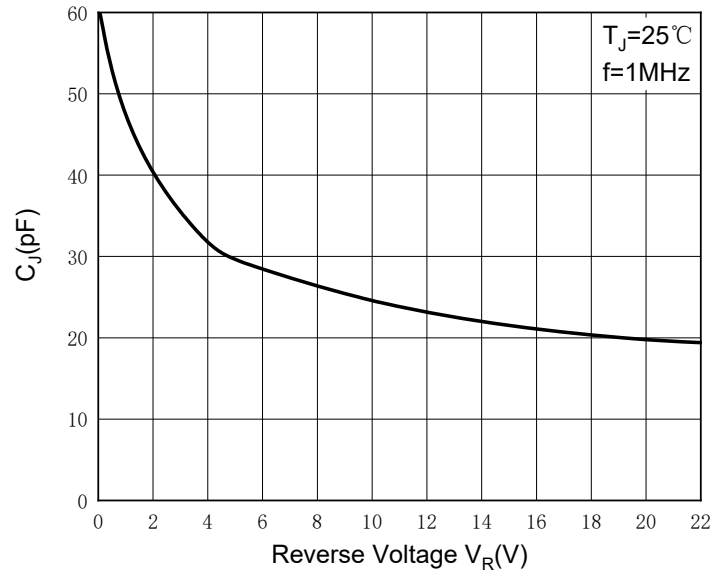

MMBZ27VAQ

■ Outline Dimensions

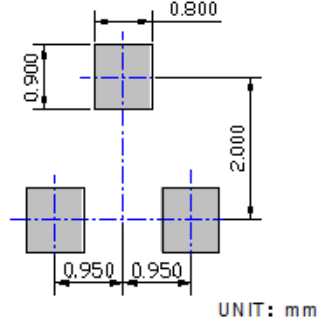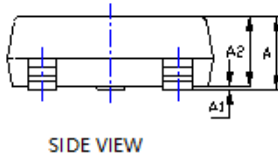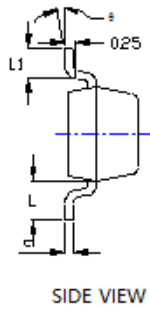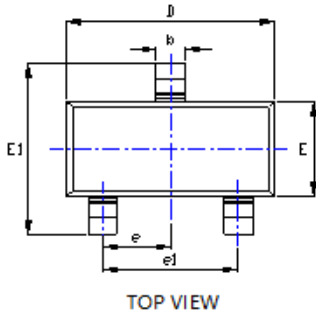

UNIT: mm

| SYMBOL | INCHES | | Millimeter | |
|--------|----------|-------|------------|-------|
| | MIN. | MAX. | MIN. | MAX. |
| A | 0.035 | 0.045 | 0.900 | 1.150 |
| A1 | 0.000 | 0.004 | 0.000 | 0.100 |
| A2 | 0.035 | 0.041 | 0.900 | 1.050 |
| b | 0.012 | 0.020 | 0.300 | 0.500 |
| c | 0.004 | 0.008 | 0.100 | 0.200 |
| D | 0.110 | 0.118 | 2.800 | 3.000 |
| E | 0.047 | 0.055 | 1.200 | 1.400 |
| E1 | 0.089 | 0.100 | 2.250 | 2.550 |
| e | 0.037TYP | | 0.950TYP | |
| e1 | 0.071 | 0.079 | 1.800 | 2.000 |
| L | 0.022REF | | 0.550REF | |
| L1 | 0.012 | 0.020 | 0.300 | 0.500 |
| φ | 0° | 8° | 0° | 8° |

NOTE:
 1. PACKAGE BODY SIZES EXCLUDE MOLD FLASH AND GATE BURRS.
 2. TOLERANCE 0.1mm UNLESS OTHERWISE SPECIFIED.
 3. THE PAD LAYOUT IS FOR REFERENCE PURPOSES ONLY.



MMBZ27VAQ

Disclaimer

The information presented in this document is for reference only. Yangzhou Yangjie Electronic Technology Co., Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise.

The product listed herein is designed to be used with automotive electronics, are not designed for use in medical, life-saving, lifesustaining, or military, Yangjie or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale.

This publication supersedes & replaces all information previously supplied. For additional information, please visit our website [http:// www.21yangjie.com](http://www.21yangjie.com) , or consult your nearest Yangjie's sales office for further assistance.