


Small Signal Zener Diode



SOT-23

Features

- Epoxy meets UL-94 V-0 flammability rating and halogen free
- Moisture Sensitivity Level 1
- Zener Voltage 3.6V~36V
- V_z -tolerance for both diodes in one case is $\leq 2\%$
- Part no. with suffix "Q" means AEC-Q101 qualified

Applications

- General regulation functions

Mechanical Data

- **Case:** SOT-23
- **Terminals:** Tin plated leads, solderable per J-STD-002 and JESD22-B102

■ Limiting Values (Absolute Maximum Rating, $T_a=25^\circ\text{C}$ Unless otherwise specified)

Characteristic	Symbol	Value	Units
Power Dissipation	$P_D^{[1]}$	300	mW
Maximum Forward Voltage ($I_F=10\text{mA}$)	V_F	0.9	V
Maximum Regulator Current	$I_{ZM}^{[1]}$	P_D / V_z	mA
Thermal Resistance from Junction to Ambient	$R_{\theta JA}$	417	$^\circ\text{C/W}$
Storage Temperature Range	T_{STG}	-55~+150	$^\circ\text{C}$
Operation Temperature	T_J	-55~+150	$^\circ\text{C}$

[1] Single diode loaded

■ Ordering Information (Example)

PREFERRED P/N	PACKING CODE	UNIT WEIGHT(g)	MINIMUM PACKAGE(pcs)	INNER BOX QUANTITY(pcs)	OUTER CARTON QUANTITY(pcs)	DELIVERY MODE
AZ23B3V6Q THRU AZ23B36Q	F2	Approximate 0.01	3000	30000	120000	7" reel



AZ23B3V6Q THRU AZ23B36Q







■Electrical Characteristics (T_a=25°C Unless otherwise specified)

Type Number	Device Marking	V _z at I _{zt} (V)			I _{zt} mA	Z _{zt} (Ω)		Z _{zk} (Ω)		I _R (μA)@V _R		Typical Temperature Coefficient@ I _{ZTC} mV/°C		Test Current I _{ZTC} mA
		min.	typ.	max.		I _{zt} (mA)	max.	I _{zk} (mA)	max.	uA	V _R (V)	Min.	Max.	
AZ23B3V6Q	D4	3.53	3.6	3.67	5	5	90	1.0	600	5	1.0	-3.5	0	5
AZ23B3V9Q	D5	3.82	3.9	3.98	5	5	90	1.0	600	3	1.0	-3.5	0	5
AZ23B4V3Q	D6	4.21	4.3	4.39	5	5	90	1.0	600	3	1.0	-3.5	0	5
AZ23B4V7Q	D7	4.61	4.7	4.79	5	5	80	1.0	500	3	2.0	-3.5	0.2	5
AZ23B5V1Q	D8	5.0	5.1	5.2	5	5	60	1.0	480	2	2.0	-2.7	1.2	5
AZ23B5V6Q	D9	5.49	5.6	5.71	5	5	40	1.0	400	1	2.0	-2	2.5	5
AZ23B6V2Q	DA	6.08	6.2	6.32	5	5	10	1.0	150	3	4.0	0.4	3.7	5
AZ23B6V8Q	DB	6.66	6.8	6.94	5	5	15	1.0	80	2	4.0	1.2	4.5	5
AZ23B7V5Q	DC	7.35	7.5	7.65	5	5	15	1.0	80	1	5.0	2.5	5.3	5
AZ23B8V2Q	DD	8.04	8.2	8.36	5	5	15	1.0	80	0.7	5.0	3.2	6.2	5
AZ23B9V1Q	DE	8.92	9.1	9.28	5	5	15	1.0	100	0.5	6.0	3.8	7.0	5
AZ23B10Q	DF	9.8	10	10.2	5	5	20	1.0	150	0.2	7.0	4.5	8.0	5
AZ23B11Q	DG	10.78	11	11.22	5	5	20	1.0	150	0.1	8.0	5.4	9.0	5
AZ23B12Q	DH	11.76	12	12.24	5	5	25	1.0	150	0.1	8.0	6.0	10.0	5
AZ23B13Q	DI	12.74	13	13.3	5	5	30	1.0	170	0.1	8.0	7.0	11.0	5
AZ23B15Q	DJ	14.7	15	15.3	5	5	30	1.0	200	0.1	10.5	9.2	13.0	5
AZ23B16Q	DK	15.68	16	16.3	5	5	40	1.0	200	0.1	11.2	10.4	14.0	5
AZ23B18Q	DL	17.6	18	18.4	5	5	45	1.0	225	0.1	12.6	12.4	16.0	5
AZ23B20Q	DM	19.6	20	20.4	5	5	55	1.0	225	0.1	14.0	14.4	18.0	5
AZ23B22Q	DN	21.56	22	22.44	5	5	55	1.0	250	0.1	15.4	16.4	20.0	5
AZ23B24Q	DO	23.52	24	24.5	5	5	70	1.0	250	0.1	16.8	18.4	22.0	5
AZ23B27Q	DP	26.46	27	27.54	2	2	80	0.5	300	0.1	18.9	21.4	25.3	2
AZ23B30Q	DQ	29.4	30	30.6	2	2	80	0.5	300	0.1	21.0	24.4	29.4	2
AZ23B33Q	DR	32.34	33	33.7	2	2	80	0.5	325	0.1	23.1	27.4	33.4	2
AZ23B36Q	DS	35.28	36	36.72	2	2	90	0.5	350	0.1	25.2	30.4	37.4	2




AZ23B3V6Q THRU AZ23B36Q

■ Characteristics (Typical)

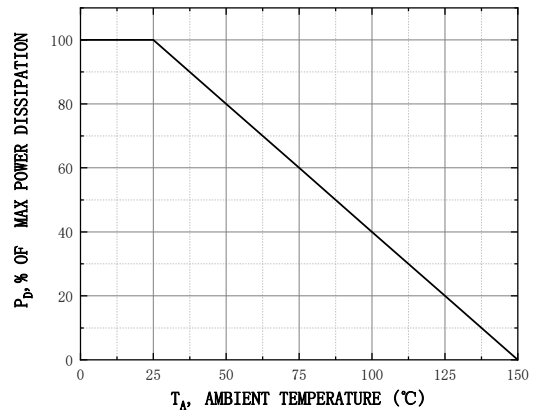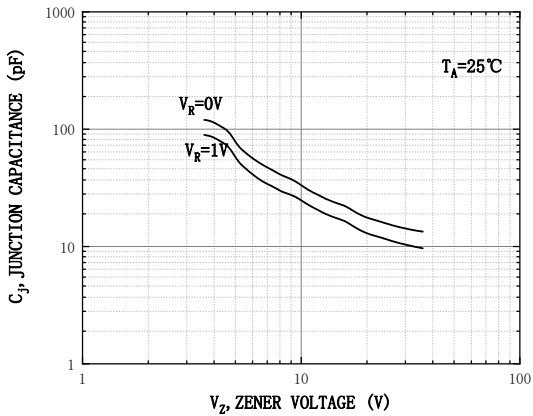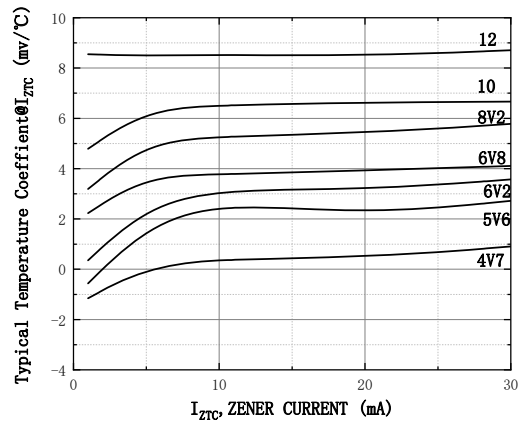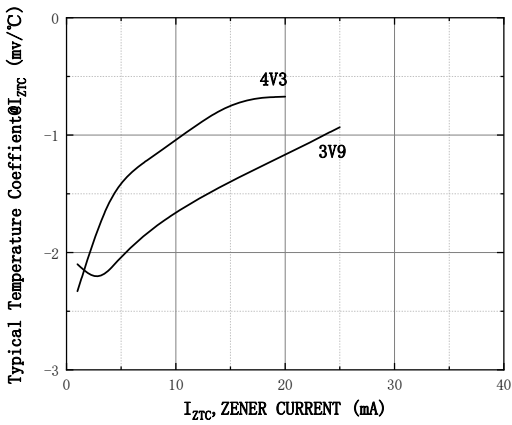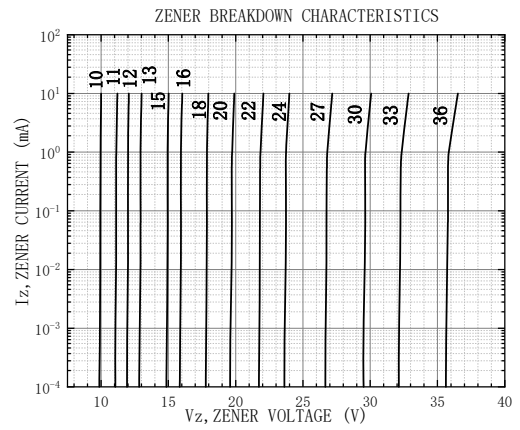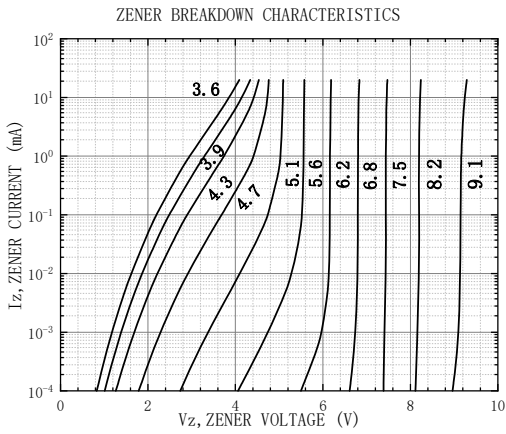







AZ23B3V6Q THRU AZ23B36Q

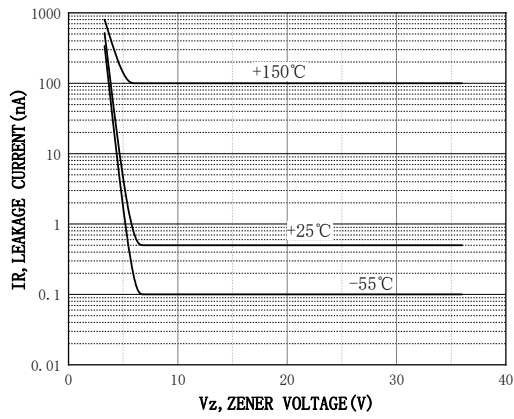



AZ23B3V6Q THRU AZ23B36Q

■ Outline Dimensions




UNIT: mm

SYMBOL	INCHES		Millimeter	
	MIN.	MAX.	MIN.	MAX.
A	0.035	0.045	0.900	1.150
A1	0.000	0.004	0.000	0.100
A2	0.035	0.041	0.900	1.050
b	0.012	0.020	0.300	0.500
c	0.004	0.008	0.100	0.200
D	0.110	0.118	2.800	3.000
E	0.047	0.055	1.200	1.400
E1	0.089	0.100	2.250	2.550
e	0.037TYP		0.950TYP	
e1	0.071	0.079	1.800	2.000
L	0.022REF		0.550REF	
L1	0.012	0.020	0.300	0.500
θ	0°	8°	0°	8°

NOTE:
 1. PACKAGE BODY SIZES EXCLUDE MOLD FLASH AND GATE BURRS.
 2. TOLERANCE 0.1mm UNLESS OTHERWISE SPECIFIED.
 3. THE PAD LAYOUT IS FOR REFERENCE PURPOSES ONLY.

■ Marking Information

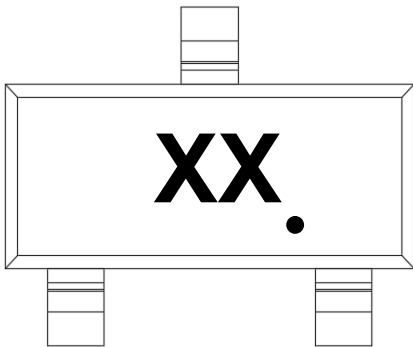

Note:

1. All marking is at middle of the product body
2. All marking is in laser marking
3. XX is Marking Code
4. Body color: Black



AZ23B3V6Q THRU AZ23B36Q

Disclaimer

The information presented in this document is for reference only. Yangzhou Yangjie Electronic Technology Co., Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise.

The product listed herein is designed to be used with automotive electronics, are not esigned for use in medical, life-saving, lifesustaining,or military,Yangjie or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale.

This publication supersedes & replaces all information previously supplied. For additional information, please visit our website [http:// www.21yangjie.com](http://www.21yangjie.com) , or consult your nearest Yangjie's sales office for further assistance.